
ioNODE Series LoRa End Device RF Module

MicroMOD-L22

Datasheet

Document Version:

SSTPL/HW/EDDS/μMDL/1.0

Table of Contents

1.	Brief Description	3
	1.1 Key Features	
	1.2 Applications	
2.	MODULE OVERVIEW	4
3.	Specifications	4
4.	ELECTRICAL CHARACTERISTICS	5
	4.1 Absolute Maximum Ratings	
	4.2 General Electrical Characteristics	
5.	MODULE PACKAGE	6
6.	PIN OUT	7
7.	RF Test Report	8
	7.1 Maximum RF output power:	
8.	Antenna Mounting Options	9
9.	IMPORTANT NOTICE	10
	9.1 Disclaimer	
	9.2 Contact Information	

1. BRIEF DESCRIPTION

uMOD-L22 is a compact, low cost, low power wide area network (LPWAN) wireless module. This new Standalone module measure 23.5*18.7mm, is constructed in a metal shielded package

This LoRa® module communicate on a long range of upto 10Km (urban areas). As uMod-L22 is low power module, it enables long battery life. uMod-L22 provides flexibility to connect and control sensors via UART, SPI, I2C, D I/O. This module has output Power of 22dBm.

Data transmission through this node is completely safe as data is encrypted by 128-bit AES encryption algorithm. It operates over the license free ISM frequency bands (865-867MHz) and serves as the end device in the Lora network infrastructure. This module complies with the latest LoRaWAN® class A & C protocol specifications.

1.1 Features

- ❖ RF output power up-to +22 dBm.
- ❖ It supports LoRa® Point to Point communications as well as LoRaWAN® protocol. Different Firmware required.
- ❖ Wide range of working voltage 3V to 3.7 V
- ❖ Sensitivity -137dBm
- ❖ Wide range of temperatures -40°C to +85°C.

1.2 Applications


Typical applications for this module include smart metering, wearables, tracking, M2M and internet of things (IoT) edge nodes.

The module's applications are as following –

- ❖ Automated Meters Reading
- ❖ Wireless Alarm and Security Systems
- ❖ Industrial Monitoring and Control
- ❖ Long Range Irrigation Systems
- ❖ Home and Building Automation

2. MODULE OVERVIEW

MicroMOD-L22 is an ultra-long range, high-performance, RF module for wireless communication. It operates in the license free 865-867 MHz ISM frequency band and includes all necessary passive components for wireless communication as depicted in the following figure.

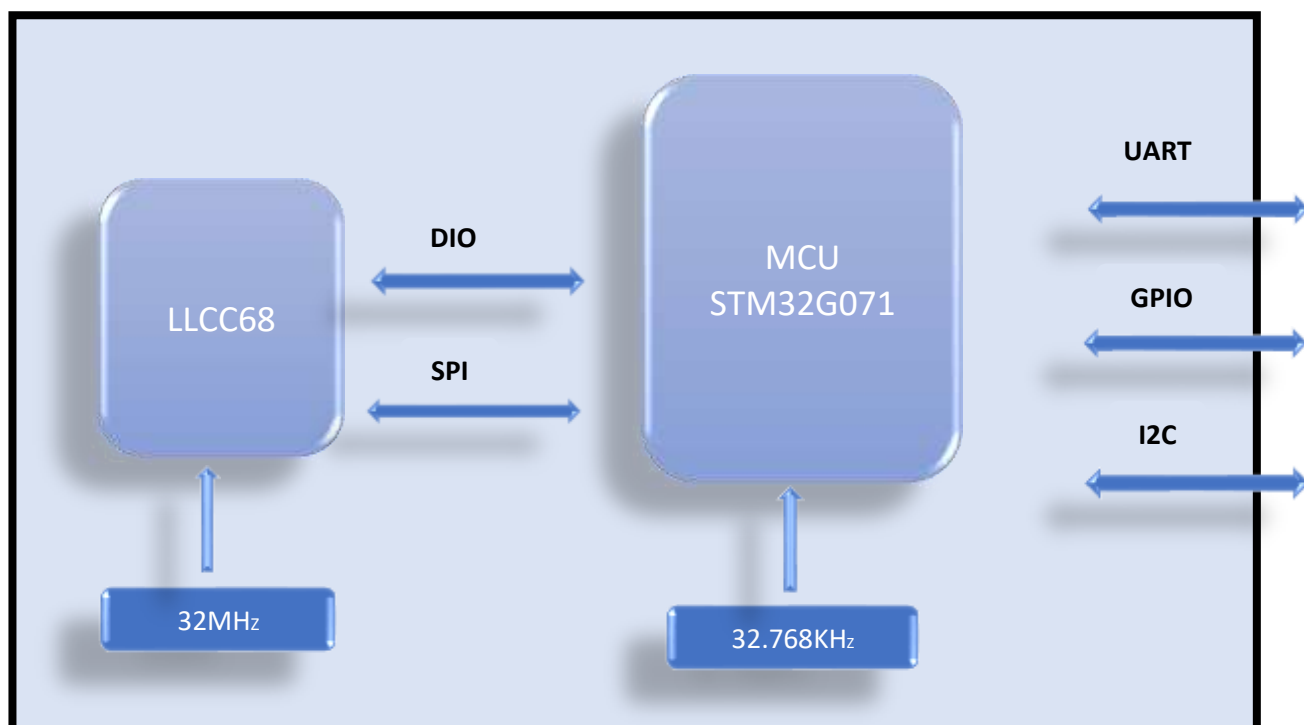

3. SPECIFICATIONS

Frequency range	865 to 867 MHz
Modulation	LoRa Spread-Spectrum
RF output power	Up to 22 dBm
Receiver sensitivity	-137 dBm (SF 12, SB 125 kHz, CR 4/6)
RF data rate	0.24 to 5 kbps
RF range	up to 5000 m (line of sight)
Operating voltage	3 V to 3.7V
Current consumption	123mA
Interfaces	UART, I2C
IO's	Digital I IO's Analog Inputs
Dimension	23.34x18.74 mm

4. ELECTRICAL CHARACTERISTICS


4.1 Maximum Ratings

Condition	Min	Typ.	Max	Unit
Supply Voltage (VDD)	3.0	3.5	3.7	V
Storage Temperature	-40	+25	+85	°C
Operating Temperature	-40	+25	+85	°C
RF Input Power	+10			dBm
ESD (Human Body Model)	2000			V
ESD (Charge Device Model)	500			V
Notes:				
1) Unless otherwise noted, all voltages are with respect to GND				

4.2 General Electrical Characteristics

T = 25°C, VDD = 3.5 V (typ.) if nothing else stated					
Parameter	Condition	Min	Typ.	Max	Unit
Supply Voltage (VDD)		3	3.5	3.7	V
Current Consumption System IDLE	RF idle mode, MCU idle mode		10		µA
Current Consumption RECEIVE LoRa	RF receive mode, MCU sleep mode		23		mA
Current Consumption TRANSMIT	RF transmit mode, MCU Active mode, all MCU units on, max. RF power level		123		mA
MCU operation frequency		32 MHz & 32.768 KHz			

5. MODULE DIMENSIONS

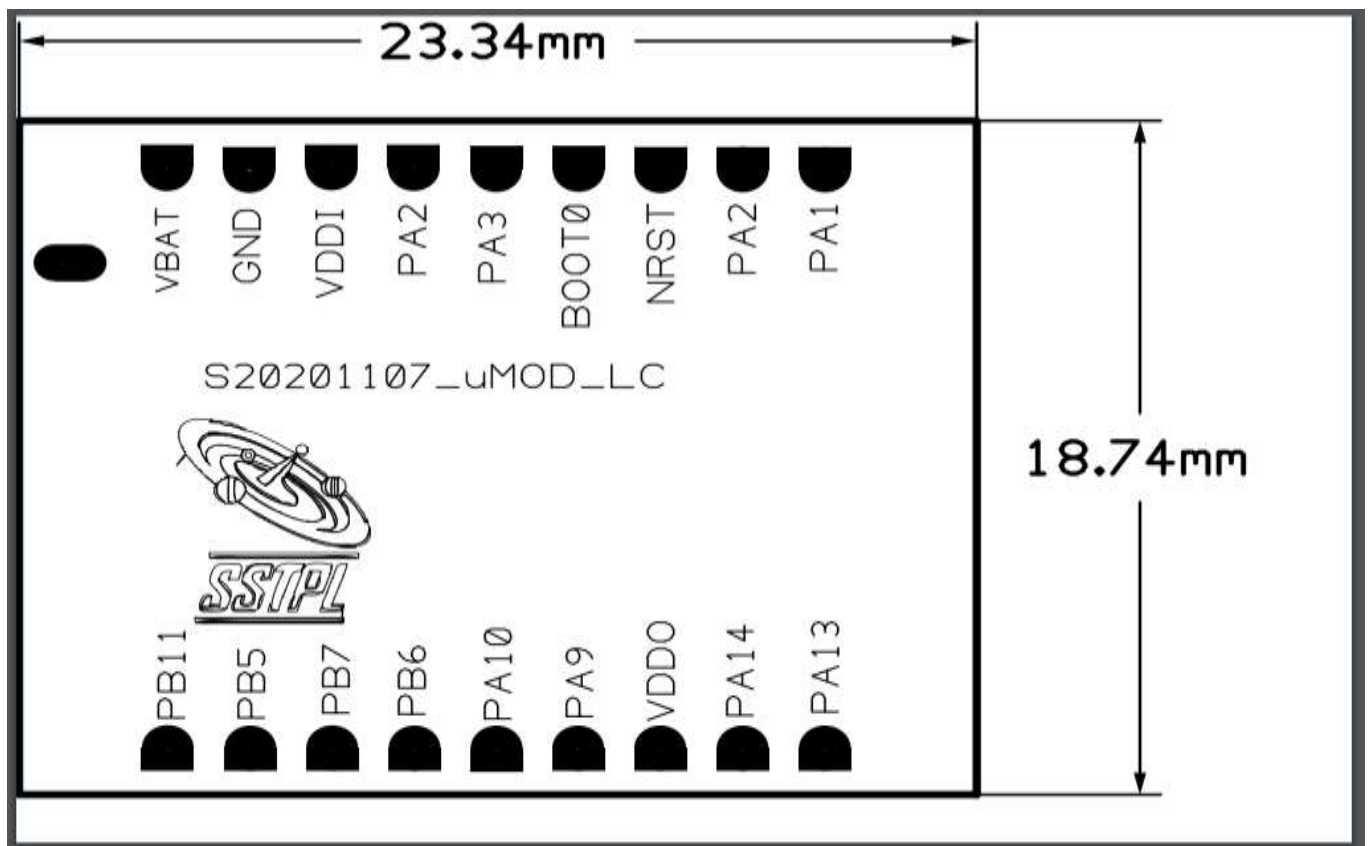


6. PINOUT DESCRIPTION

PIN	PIN Name	PIN Type	MCU Pin (number)	5 V Tolerance	Description
1	PA1	D I/O	PA1	Yes	ADC IN1
2	PA0	D I/O	PA0	Yes	ADC IN_0
3	nRst	D IN	NRST	NO	NReset, internally pulled-up by 47 kΩ
4	Boot	D IN	BOOT0	No	Bootloader Pin 0, internally pulled down by 47 kΩ
5	PA3	D I/O	PA3	Yes	UART Rx, ADC IN_3, LPUART Rx
6	PA2	D I/O	PA2	Yes	UART Tx, ADC IN_2, LPUART Tx
7	VDDI	Supply	VDDI	No	Main Supply
8	GND	Supply	Ground connection		GND
9	NC/VBAT	Supply	VBAT	No	Power Supply
10	PB11	D I/O	PB11	Yes	LPUART1_Tx, LPUART1_Rx
11	PB 5	D I/O	PB5	Yes	SPI_MOSI
12	PB7	D I/O	PB7	Yes	UART1_Rx, I2C1_SDA
13	PB6	D I/O	PB 6	Yes	UART1_Tx, I2C1_SCL
14	PA10	D I/O	PA10	Yes	UART1_Rx, I2C1_SDA
15	PA9	D I/O	PA9	Yes	UART1_Tx, I2C1_SCL
16	VDDO	Supply	-		3.3V out up-to 20 mA
17	PA14	D I/O	PA14	Yes	SWCLK
18	PA13	D I/O	PA13	Yes	SWDIO

7. RF TEST REPORT

7.1 Maximum RF output power:

Frequency	Output Power (dBm)
866MHz	20.25*

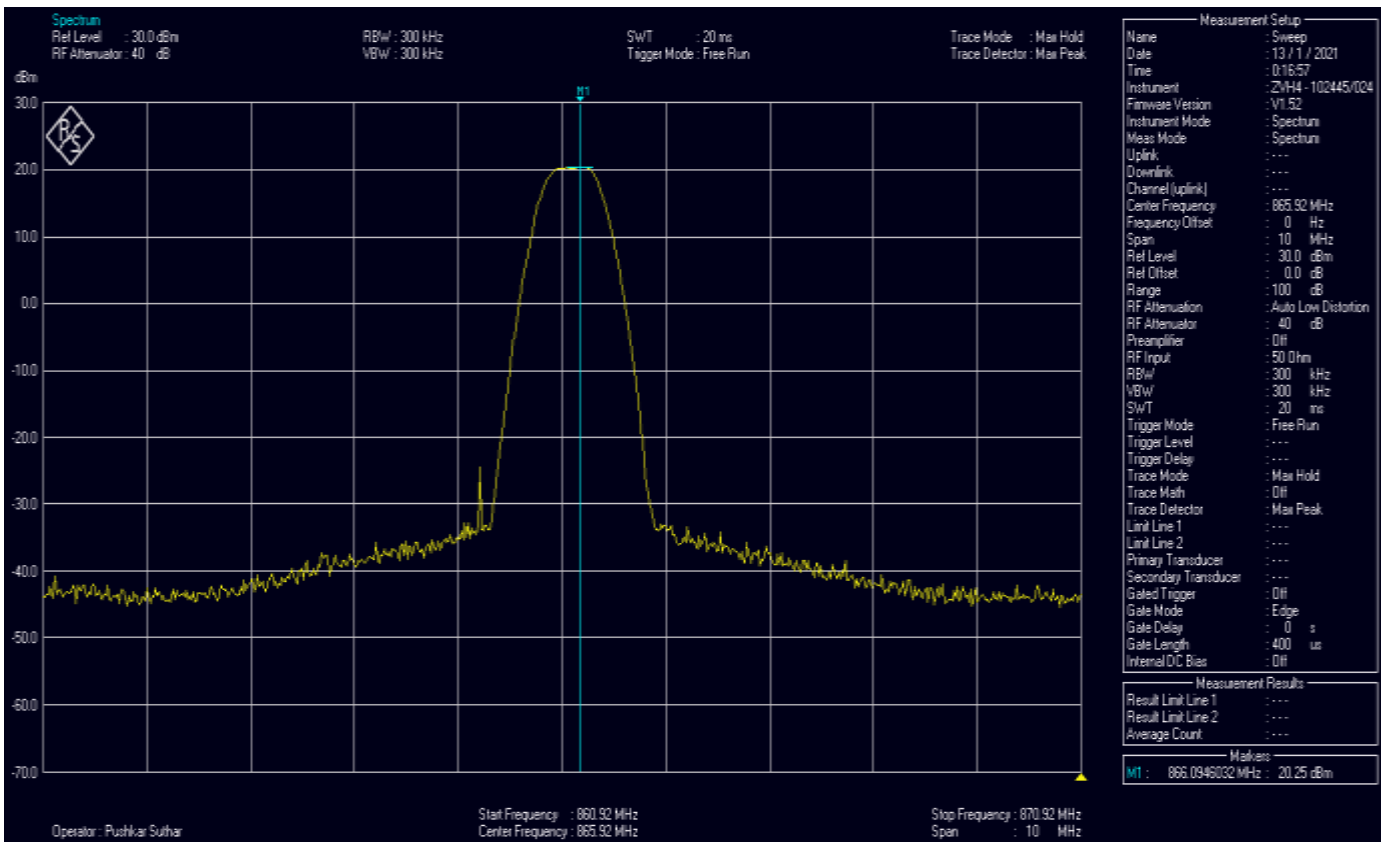

8. ANTENNA MOUNTING OPTIONS

To serve the propose of multiple antenna requirement, MicroMOD-L22 comes with multiple options. Below are the MicroMOD-L22 Antenna options:

1. Connect an external antenna thru the UFL connector mounted on PCB. It can be Simply connected thru a UFL Pigtail to antenna of your choice. Here 50 Ω impedance matched antenna will work.
2. Through Hole Spring Helical antenna can also be used if antenna needs to be integral part of module. Just unmount the UFL connector and used through hole beneath the UFL connector pad to connect Spring Helical or other wire antenna. The recommend thick ness of wire is 0.7 to 0.9 mm to get it mounted in the PCB hole.
3. MicroMOD-L22 has edge half cut pads to extend the RF signals on Daughter Board PCB and antenna can be mounted separately on DB PCB. Here needs to take care the 50 Ω impedance characteristics of the RF track.

9. IMPORTANT NOTICE

9.1 Disclaimer

SSTPL points out that all information in this document is given on an “as is” basis. No guarantee, neither explicit nor implicit is given for the correctness at the time of publication. SSTPL reserves all rights to make corrections, modifications, enhancements, and other changes to its products and services at any time and to discontinue any product or service without prior notice. It is recommended for customers to refer to the latest relevant information before placing orders and to verify that such information is current and complete. All products are sold and delivered subject to “General Terms and Conditions” of SSTPL, supplied at the time of order acknowledgment.

SSTPL assumes no liability for the use of its products and does not grant any licenses for its patent rights or for any other of its intellectual property rights or third-party rights. It is the customer’s duty to bear responsibility for compliance of systems or units in which products from SSTPL are integrated with applicable legal regulations. Customers should provide adequate design and operating safeguards to minimize the risks associated with customer products and applications. The products are not approved for use in life supporting systems or other systems whose malfunction could result in personal injury to the user. Customers using the products within such applications do so at their own risk.

Any reproduction of information in datasheets of SSTPL is permissible only if reproduction is without alteration and is accompanied by all given associated warranties, conditions, limitations, and notices. Any resale of SSTPL products or services with statements different from or beyond the parameters stated by SSTPL for that product/solution or service is not allowed and voids all express and any implied warranties. The limitations on liability in favour of SSTPL shall also affect its employees, executive personnel, and bodies in the same way. SSTPL is not responsible or for any such wrong statements.

Copyright © 2020, SSTPL

9.2 Contact Information

Sehaj Synergy Technologies Pvt. Ltd. (SSTPL)

Indu Bhawan, J-9/J-7/3, Bhagwan Marg, Swage Farm,
New Sanganer Road, Sodala, Jaipur-302019, Rajasthan, India

T: +911414017908 M: +91 8890200333 E: info@sstpl.net.in Web: www.sstpl.in